

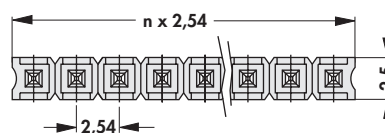


Male headers

Male connectors for LED applications

- insulating body made of white plastic (nature)
- one row, \square 0.635 mm



art. no.	dim. [mm]		
	B	C	S
SL 23 LED SMD 031 ...	5.2	3.1	4
SL 23 LED SMD 058 ...		5.8	5

please indicate:




... no. of contacts
one row 2 - 20

... surface of contact
S = selective gold-plated
G = gold-plated
Z = tin-plated



... packing (optional)
B SM = pick and place pad
and bar magazine
B TR = pick and place pad
and tape and reel
(500pcs/reel)

... packing (option) - additions:
SL 23 LED ... B TR: 2-13 contacts

Option for automatic assembly

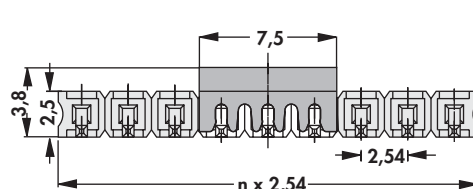

SL 23 LED SMD ... B SM

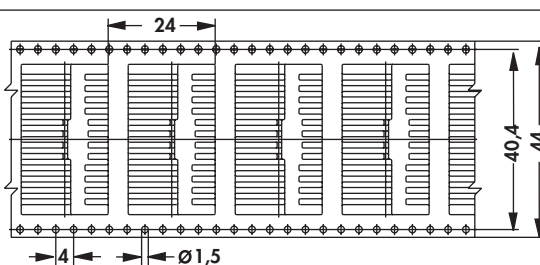

SL 23 LED SMD ... B TR