


## Data sheet Product SK 458 ...




Cooling aggregates>High-performance heatsinks  
 for forced convection, mounting area(s) milled flat

### Features

|                     |  |
|---------------------|--|
| number of fins:     | 19   |
| width:              | 250 mm   |
| height:             | 84 mm  |
| length:             | 150 mm / 200 mm / 300 mm / 1000 mm   |
| thermal resistance: | 0.058 - 0.028 K/W  |
| surface:            | <ul style="list-style-type: none"> <li>• black anodised</li> <li>• raw degreased aluminium (by the metre raw aluminium)</li> </ul> |

### Technical Drawing

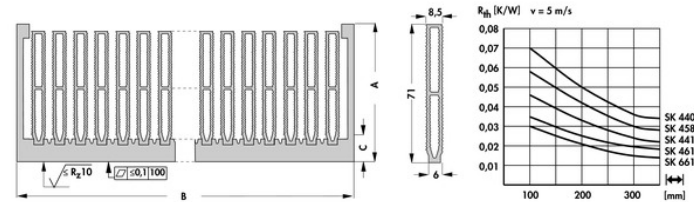

|    |        |
|----|--------|
| A: | 84 mm  |
| B: | 250 mm |
| C: | 16 mm  |