
- Provides different axial locking direction, reducing the number of parts and saving more space
- Leading end is chamfered to prevent rotation, enhancing the reliability
- Two-sides locking to provide applications with less limit
- Automated production improves stability and reduce labor cost

SMT Angle Lock Patented.






Installation





Panel Preparation

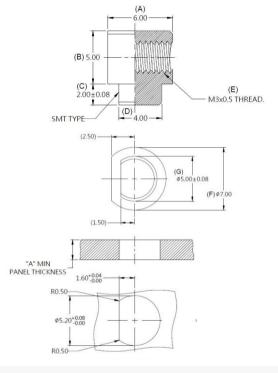

Dimensions (mm)

LENGTH "T"	PROJECTION		PANEL THICKNESS		DIMENSINOS	
	" P-1 "	" P-2 "	"A" MIN	"A" MAX	" L "	" B "
~	~	2	2.1	~	~	~